


LET'S MANUFACTURE TOMORROW

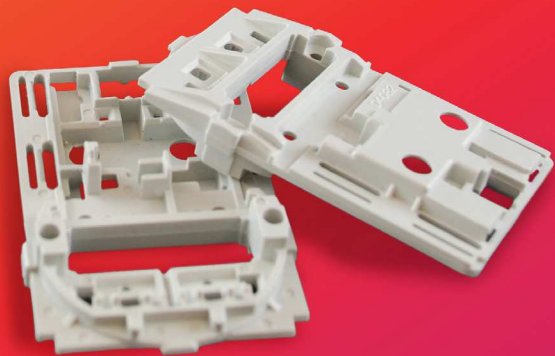

**SOMOS®
PERFORM**

SOMOS® PERFORM

A fast processing stereolithography material resulting in strong, stiff and accurate parts with high feature resolution

Somos® PerFORM produces strong, stiff, high temperature resistant composite parts that are ideal for tooling and wind tunnel testing applications.

With the lowest viscosity of any composite stereolithography material, parts made from Somos® PerFORM are faster to build, easier to post-process clean, possess superior sidewall quality and provide unmatched detail resolution.

It is the ideal material for creating strong, stiff parts with excellent high heat resistance, including wind tunnel models for aerospace and automotive applications, as well as rapid tooling for injection molding.

Expanded application opportunities for TMG

Somos® PerFORM has allowed Toyota Motorsport GmbH to break into a new area of business for the industry.

Through the use of Somos® PerFORM, TMG is able to produce tooling for injection molding. Combining the cost efficiency and fast production times of traditional additive manufacturing with the accuracy and high definition required in the injection molding industry has been made possible through the innovative characteristics of Somos® PerFORM.

Key Benefits

- Excellent detail resolution
- Fast, easy processing & finishing
- Superior high heat tolerance

Applications

- Tooling
- Wind tunnel testing
- High temperature testing
- Electrical casings
- Automotive housings

Liquid Properties		Optical Properties			
Appearance	Off-White	E _c	7.8 mJ/cm ²	[critical exposure]	
Viscosity	~1,000 cps @ 30°C	D _p	4.3 mils	[slope of cue-depth vs ln (E)curve]	
Density	~1.61 g/cm ³ @ 25°C	E ₁₀	80 mJ/cm ²	[exposure that gives 0.254 mm(.010 inch) thickness]	

Mechanical Properties		UV Postcure		Thermal Postcure	
ASTM Method	Property Description	Metric	Imperial	Metric	Imperial
D638M	Tensile Strength	68 MPa	9.9 ksi	80 MPa	11.6 ksi
D638M	Tensile Modulus	10,500 MPa	1,520 ksi	9,800 MPa	1,420 ksi
D638M	Elongation at Break	1.1%		1.2%	
D638M	Poisson's Ratio	0.32		0.33	
D790M	Flexural Strength	120 MPa	17.4 ksi	146 MPa	21.2 ksi
D790M	Flexural Modulus	10,000 MPa	1,450 ksi	9,030 MPa	1,310 ksi
D256A	Izod Impact (Notched)	17 J/m	0.32 ft-lb/in	20 J/m	0.37 ft-lb/in
D2240	Hardness (Shore D)	94		93	
D570-98	Water Absorption	0.2%		0.1%	

Thermal/Electric Properties		UV Postcure		Thermal Postcure	
ASTM Method	Property Description	Metric	Imperial	Metric	Imperial
E831-05	C.T.E. -40 - 0°C (-40 - 32°F)	29.9 µm/m°C	16.6 µin/in°F	26.4 µm/m°C	14.7 µin/in°F
E831-05	C.T.E. 0 - 50°C (32 - 122°F)	49.4 µm/m°C	27.4 µin/in°F	34.3 µm/m°C	19.1 µin/in°F
E831-05	C.T.E. 50 - 100°C (122 - 212°F)	79.1 µm/m°C	43.9 µin/in°F	59.9 µm/m°C	33.3 µin/in°F
E831-05	C.T.E. 100 - 150°C (212 - 302°F)	80.9 µm/m°C	45.0 µin/in°F	94.7 µm/m°C	52.6 µin/in°F
D150-98	Dielectric Constant 60 Hz	4.0		4.0	
D150-98	Dielectric Constant 1 KHz	3.8		3.9	
D150-98	Dielectric Constant 1 MHz	3.6		3.7	
D149-97A	Dielectric Strength	26.3 kV/mm	668 V/mil	25.4 kV/mm	644 V/mil
E1545-11	T _g	72°C	162°F	81°C	178°F
D648	HDT @ 0.46 MPa (66 psi)	132°C	270°F	268°C	514°F
D648	HDT @ 1.81 MPa (264 psi)	82°C	180°F	119°C	246°F

For more information and buying options, please visit www.dsm.com/additive-manufacturing/

DSM – Bright Science. Brighter Living.™

All information supplied by or on behalf of DSM in relation to its products, whether in the nature of data, recommendations or otherwise, is supported by research and, in good faith, believed reliable, but DSM assumes no liability and makes no warranties of any kind, express or implied, including, but not limited to, those of title, merchantability, fitness for a particular purpose or non-infringement or any warranty arising from a course of dealing, usage, or trade practice whatsoever in respect of application, processing or use made of aforementioned information, or product. The user assumes all responsibility for the use of all information provided and shall verify quality and other properties or any consequences from the use of all such information.

Somos® is a trademark of DSM.
Copyright © DSM 2020. All rights reserved. No part of the information may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of DSM. Doc 0046-01

